


## Wymiary silników serii AGM, AGM2E (IE2), AGM3E (IE3) wznieś 71-200

### Montaż na łapach - B3

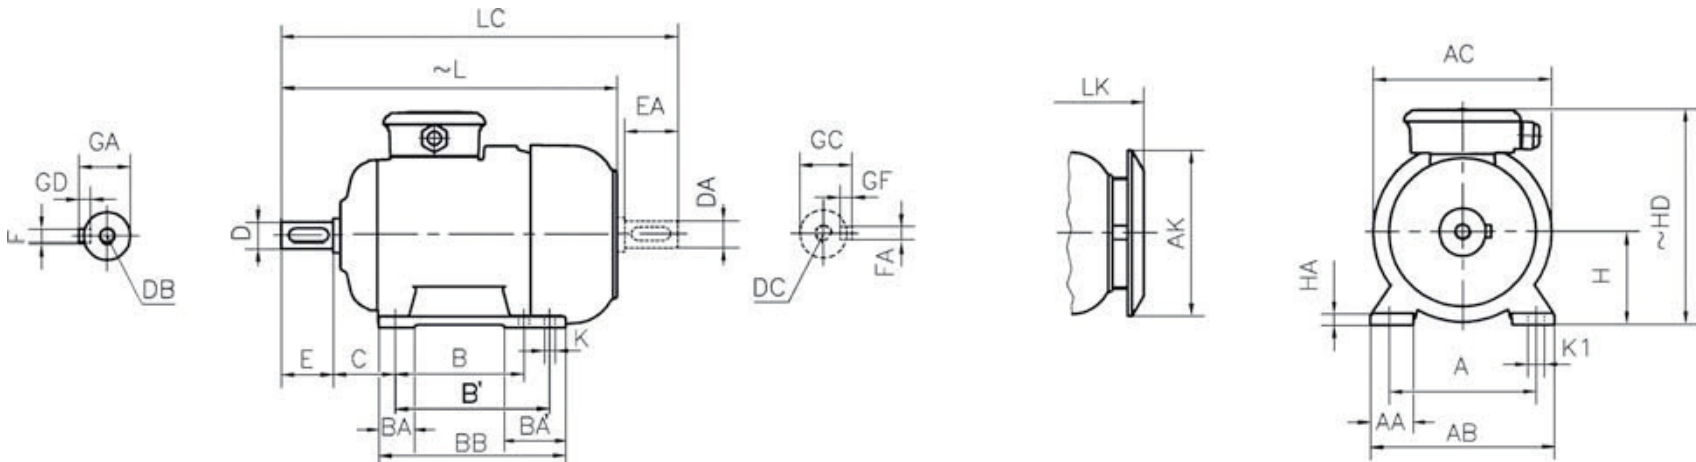

wielkość mechaniczna	ilość biegunów	wymiary silników montowanych za pomocą łap dla rodzajów montażu: B3, B6, B7, B8, B15, V5, V6																							
		H	HD ~	HA	A	AA	AB	∅AC	∅AK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB <sup>1)</sup> DC	∅ D ∅ DA	GA GC	FxGD FxGF
71	2-4-6-8	71	182	10	112	33	140	138	116	7	11	90	-	27	-	108	249	284	278	45	30	M5	14	16	5X5
80	2-4-6-8	80	198	10	125	38	160	156	151	10	15	100	-	33	-	125	279	324	308	50	40	M6	19	21.5	6X6
90	S 2-4-6-8	90	216	12	140	43	180	176	151	10	15	100	-	-	-	130	309	364	338	56	50	M8	24	27	8X7
	125											-	-	-	155	334	389	363							
100	L 2-4-6-8	100	234	13	160	47	200	194	189	12	18	140	-	39	-	175	376	442	413	63	60	M10	28	31	8X7
	4 <sup>3)</sup>																406	472	443						
112	M 2-4-6-8	112	257	13	190	47	230	218	189	12	18	140	-	39	-	175	396	462	433	70	60	M10	28	31	8X7
	4 <sup>4)</sup>																421	487	458						
132	S 2-4-6-8	132	300	15	216	49	260	257	239	12	18	140	-	-	-	180	460	546	497	89	80	M12	38	41	10X8
	M 4-6 <sup>5)</sup>											178	-	-	218	498	584	535							
160	M 2-4-6-8	160	380	21,5	254	60	312	310	303	15	19	210	254	60	104	304	600	716	657	108	110	M16	42	45	12x8
	L 2-4 <sup>6)</sup>																644	760	701						
180	M 2-4-6-8	180	421	24	279	68	354	348	303	15	19	241	279	57	95	320	657	773	714	121	110	M16	48	51.5	14x9
200	L 2-4-6-8	200	477	26	318	80	398	390	370	19	24	305	-	68	-	355	747	865	803	133	110	M20	55	59	16x10
Tolerances		-0.5																							

Wszystkie wymiary w mm