


Wymiary silników żeliwnych serii GM, GM2E (IE2), GM3E (IE3)

wznios 132-450

Montaż kołnierzowy - B5

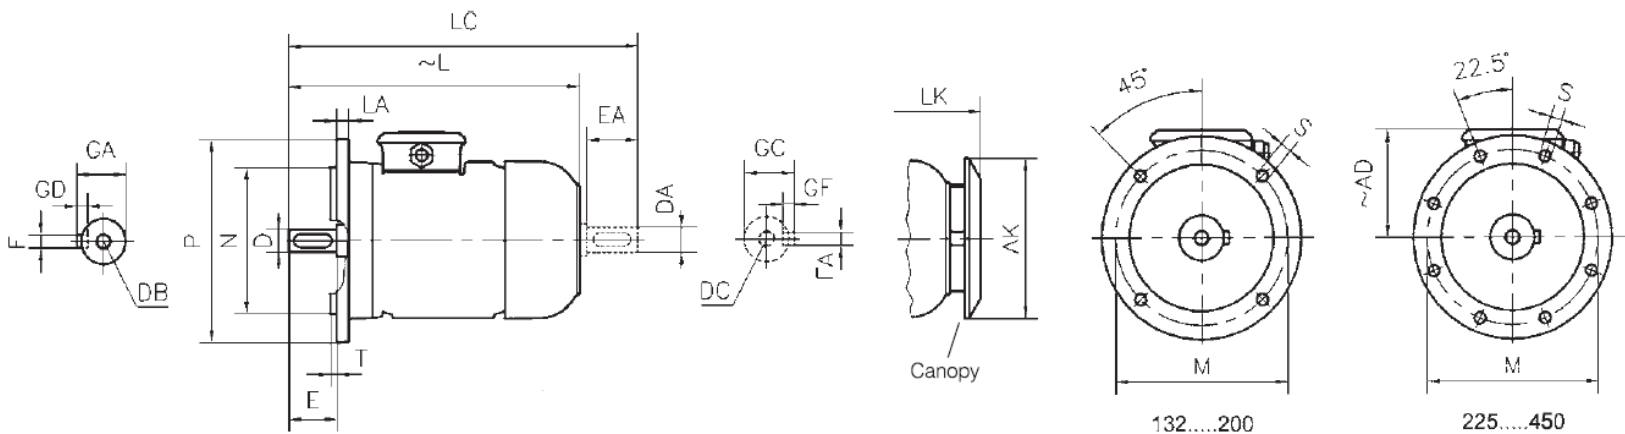

Wszystkie wymiary w mm

wielkość mechaniczna	ilość biegunów	Flange No.	ØM	ØN	ØP	Clearance hole		T	LA	AD ~	Ø AK	L ~	LC	LK ~	E EA	DB ²⁾ DC	Ø D Ø DA	GA GC	FxGD FxGF					
						No.	ØS																	
132	S M	2-4-6-8	FF 265	265	230	300	4	14,5	4	20	168	239	498	584	535	80	M12	38	41	10X8				
160	M L	2-4-6-8	FF 300	300	250	350	4	18,5	5	20	225	303	600	716	657	110	M16	42	45	12X8				
														644	760						701			
180	M L	2-4-6-8	FF 300	300	250	350	4	18,5	5	20	241	303	657	773	714	110	M16	48	51,5	14X9				
														695	811						752			
200	L	2-4-6-8	FF 350	350	300	400	4	18,5	5	20	275	370	747	865	803	110	M20	55	59	16X10				
225	S	4-8	FF 400	400	350	450	8	18,5	5	20	285	370	795	943	851	140	M20	60	64	18X11				
	M	2											790	908	846						110	55	59	16X10
		4-6-8											820	968	876						140	60	64	18X11
250	M	2	FF 500	500	450	550	8	18,5	5	24	322	440	896	1044	952	140	M20	60	64	18X11				
		4-6-8																65			69			
280	S	2	FF 500	500	450	550	8	18,5	5	24	350	440	958	1106	1014	140	M20	65	69	18X11				
		4-6-8																75			79.5	20X12		
	M	2																65	69	18X11				
		4-6-8																75			79.5	20X12		
315	S	2	FF 600	600	550	660	8	24	6	24	510	571	1120	1270	1197	140	M20	65	69	18X11				
		4-6-8											1150	1330	1227			170			85	90	22X14	
	M	2											1120	1270	1197	140		65	69	18X11				
		4-6-8											1150	1330	1227	170		85			90	22X14		
	L	2											1190	1340	1267	140		65	69	18X11				
		4-6-8											1220	1400	1297	170		85			90	22X14		
355	M	2	FF 740	740	680	800	8	24	6	32	625	571	1337	1517	1414	170	M20	80	85	22X14				
		4-6-8											1377	1597	1454	210	M24	100			106	28X16		
	L	2											1467	1647	1544	170	M20	80	85	22X14				
		4-6-8											1507	1727	1584	210	M24	100			106	28X16		
400	L	2	FF 940 ³⁾	940	880	1000	8	28	6	32	700	571	1560	1740	1637	170	M20	80	85	22X14				
		4-6-8											1600	1820	1677	210	M24	110			116	28X16		
450	L	2	FF1080 ³⁾	1080	1000	1150	8	28	6	32	751	571	1768	1948	1845	170	M24	90	95	25X14				
		4-6-8											1808	2028	1885	210		120			127	32X18		
Tolerances				j6																				